











PART NO 912167





BEAM BRACKET R

Balkfäste R | Bjelkefeste R | Sijos kronšteinas R | Kiriş braketi R

-  L: 200 mm
-  W: 230 mm
-  H: 360 mm
-  4,5 kg
-  Steel + Zn (hot dip galvanized)
-  EN13374 – A



-  1,03 × 0,91 × 0,65 m
-  200 kg
-  50 pcs

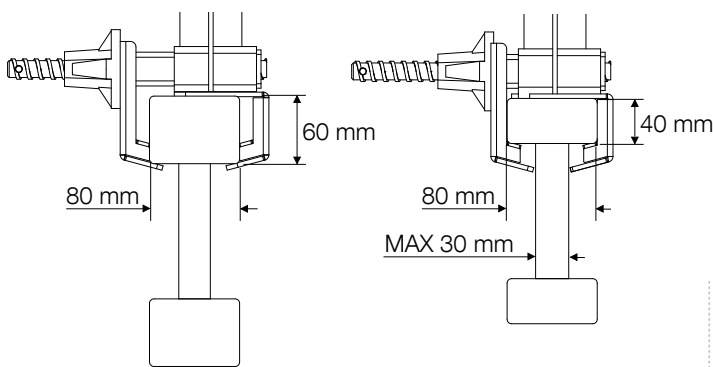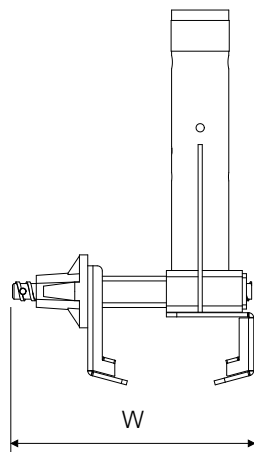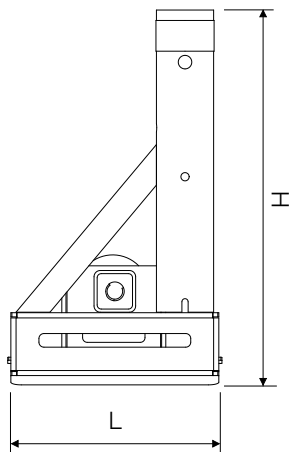

BENDING MOMENT (Q) ¹ (Unfactored)	
M _k	720 Nm
¹) Loads acc. to EN 13374:2013 $Q_{Ed} \times \gamma_F^* = E_d \leq R_d = R_k / \gamma_M (k_{mod}^{**})$ * $\gamma_F = 1,5$ ** for timber	

