










PART NO 5040001






VT FOOT

Stolpfot VT | VT Fuß

-  L: 195 mm
-  W: 125 mm
-  H: 130 mm
-  1,1 kg
-  Steel + Zn (hot dip galvanized)
-  EN13374 – A



-  1,24 × 0,84 × 0,97 m
-  620 kg
-  500 pcs

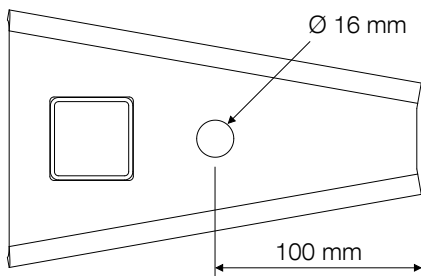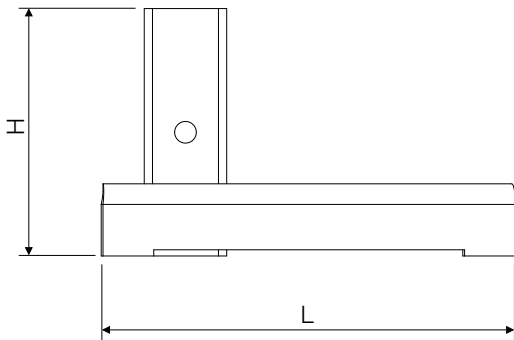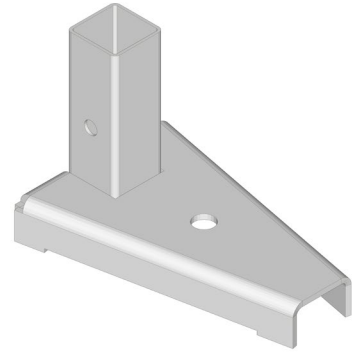

ANCHOR LOADS (Q) ¹ (Unfactored)	
N _k	6,3 kN
V _k	0,7 kN

¹) EN 13374:2013
 $Q_{k,l} \times \gamma_F^* = E_d \leq R_d = R_k / \gamma_M (k_{mod}^{**})$
^{*} $\gamma_F = 1,5$ ^{**} for timber

